

Kiran


LIGHTING ENGINEERS

2025-26




ISO 9001-2015 / ISO 14001-2015

LIGHTING ENGINEERS the company

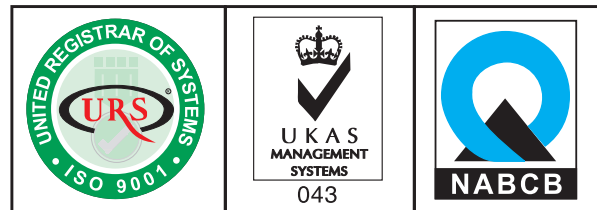

ISO 9001-2015 / ISO 14001-2015

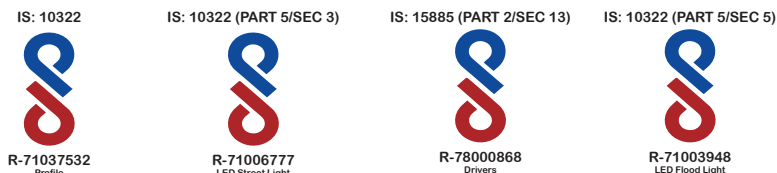

Lighting Engineers under the brand name *Kiran* we are manufacturing and marketing Conventional and LED Luminaries since 30years. Our Firm (Company) registered with MSME UDYAM-MH-17-0034393 & NSIC and Certified ISO 9001-2015 & 14001-2015 (enviroment).

The 5 key advantage of LED Luminaries are - Adaptability for shallow luminaries, better performance, less energy consumption, easy maintenance and environment friendly.

Range of Products

Domestic Luminaries: All Range of Conventional & LED Luminaries.

Decorative Luminaries:

1) **Recessed Mounting :** Luminaries in wide & versatile range suitable for all type of false ceilings, such as POP Aluminium Frame Panels, GRG ceiling & versatile range

2) **Surface Mounting :** Luminaries in wide & Versatile range .

Post Top Luminaries : Luminaries for Garden Gate & Bollard in various shape, sizes and attractive colours.

Street Light Luminaries : Complete range of LED street Light from 15w to 150w and conventional SV/MH and T 5 range.

Industrial Luminaries : Complete range of LED Hibay, Well Glass & Flame Proof.

Flood Light Luminaries : Complete range of LED Flood Light from 20w to 400w in Multi LED and COB and conventional -70, 150, 250, 400w SV/MH.

LED Light : Luminaries of LED for various purposes.

Cleanroom Luminaries : Clean room luminaries for special clean room application in various pharma requirements.


Solar Luminaries : Solar LED Luminaries available for outdoor.

Smart Light : COB, Linear, Downlight also Strip light with relay.

Control : RF and Software.




K001




Application:	Available in:	Driver:	Features:
-Cove, Shelves -Office -Retail -Residence, Kitchen	-CC / CV	-Fulham -Osram -Helvar	-Available with Translucent Diffuser

Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
4.5 W/ ft	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Surface/Cove

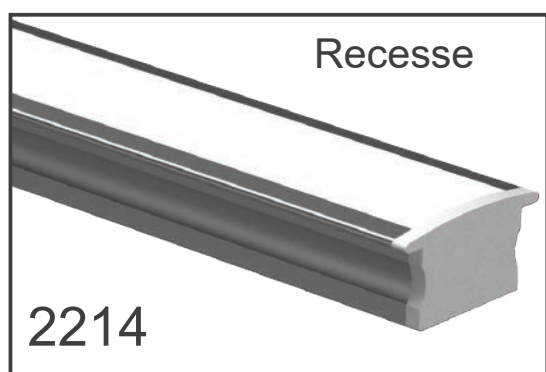


K002




Application:	Available in:	Driver:	Features:
-Wardrobe, Kitchen -Office -Retail -Residence	-CC / CV	-Fulham -Osram -Helvar	-Available with Translucent Diffuser

Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
4.5 W/ ft	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Surface/Cove

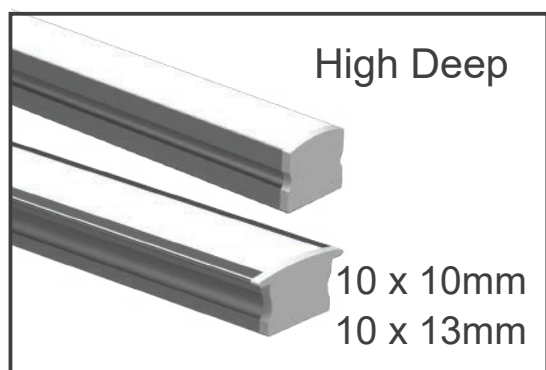


K003




Application:	Available in:	Driver:	Features:
-Cove, Shelves -Office -Retail -Wardrobe, Kitchen -Residence	-CC / CV	-Fulham -Osram -Helvar	-Available with Opal Diffuser

Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
4.5 W/ ft	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Surface/Cove

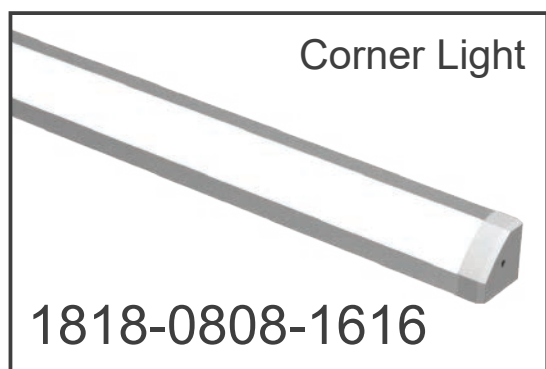


K004




Application:	Available in:	Driver:	Features:
-Wardrobe -Staircase -Retail -Residence	-CC / CV	-Fulham -Osram -Helvar	-Suitable For Corners -Available with Translucent Diffuser



Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
4.5 W/ ft	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Surface(Corner)



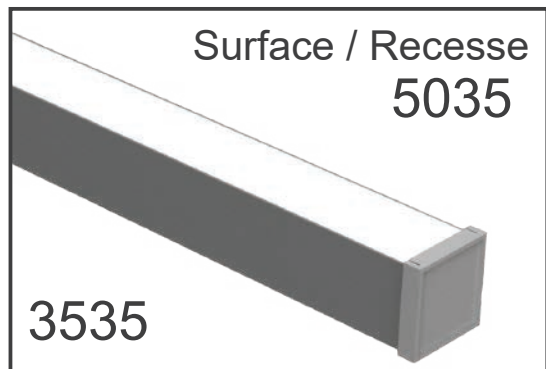


K005

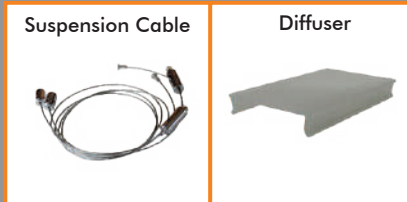



Application:	Available in:	Driver:	Features:
-Office -Retail -Residence	-CC / CV	-Fulham -Osram -Heller	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Surface

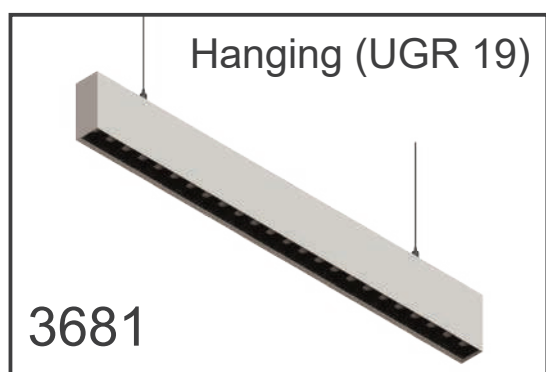


K006

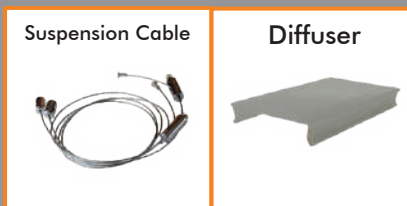



Application:	Available in:	Driver:	Features:
-Office -Retail -Residence	-CC / CV	-Fulham -Osram -Heller	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Hanging

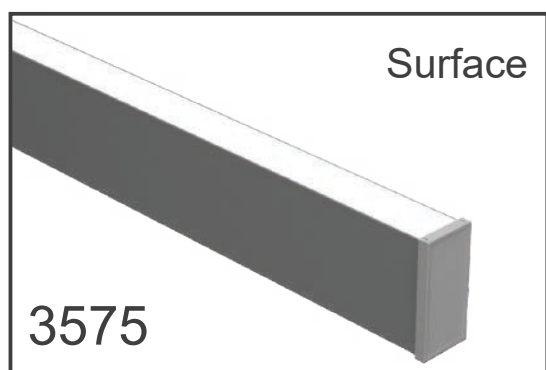

K007

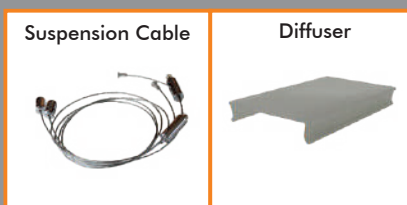



Application:	Available in:	Driver:	Features:
-Office -Retail -Residence	-CC / CV	-Fulham -Osram -Heller	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Suspended



K008

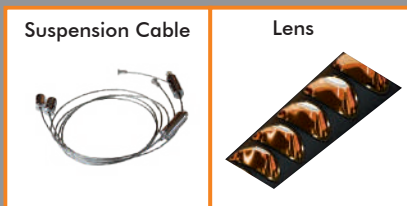


Application:	Available in:	Driver:	Features:
-Office -Retail -Residence	-CC / CV	-Fulham -Osram -Heller	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Surface/Suspended



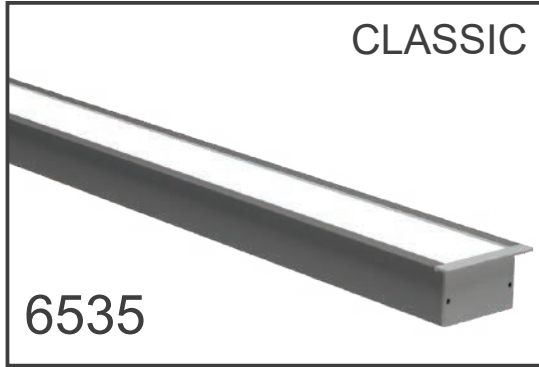


K009

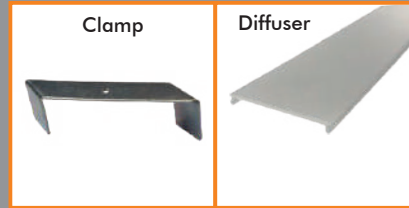



Application:	Available in:	Driver:	Features:
-Office -Retail	-CC / CV	-Fulham -Osram -Helvar	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Recess

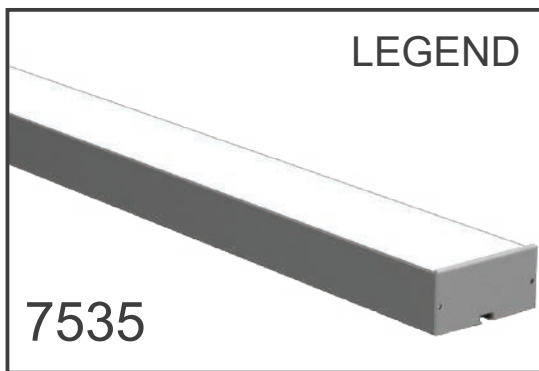


K010

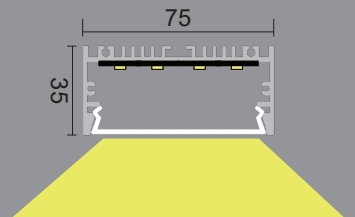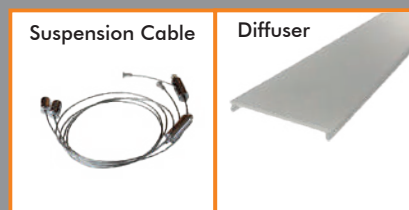



Application:	Available in:	Driver:	Features:
-Office -Retail	-CC / CV	-Fulham -Osram -Helvar	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Surface/Suspended

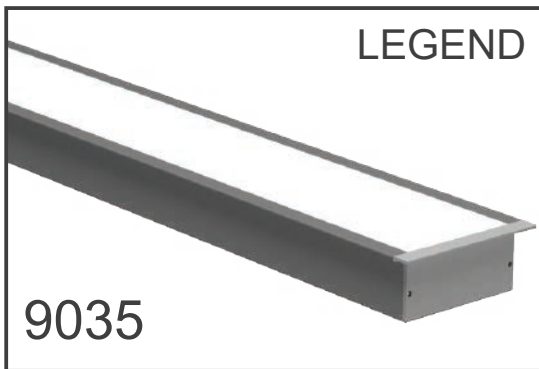


K011

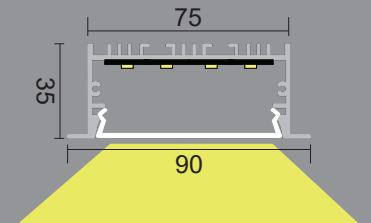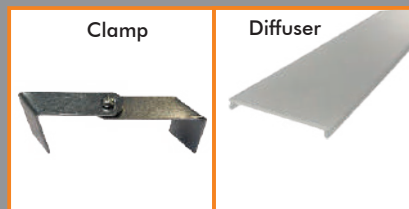



Application:	Available in:	Driver:	Features:
-Office -Retail -Hospital	-CC / CV	-Fulham -Osram -Helvar	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Recess

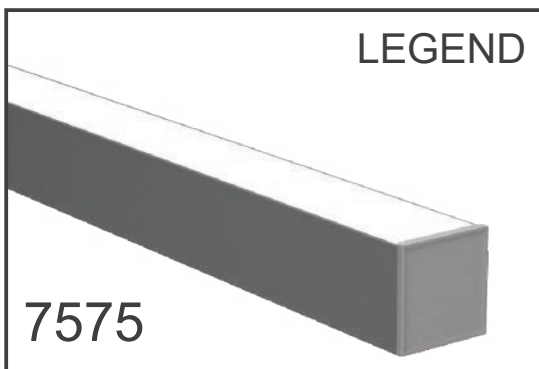


K012

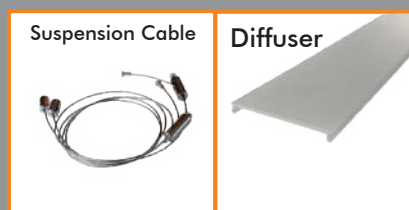


Application:	Available in:	Driver:	Features:
-Office -Retail -Metro, Mall, Airport	-CC / CV	-Fulham -Osram -Helvar	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Suspended



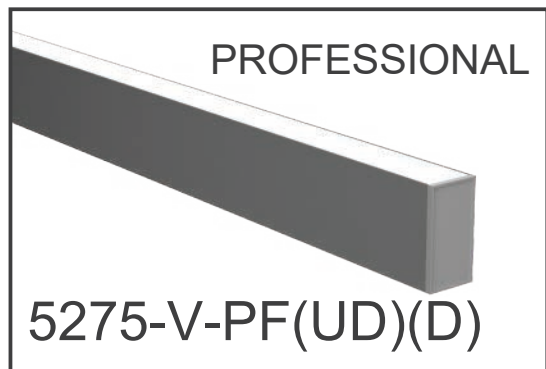

K013

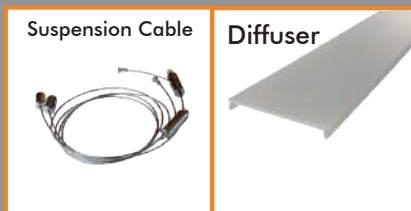



Application: -Office -Retail -Metro, Mall, Airport	Available in: -CC / CV	Driver: -Fulham -Osram -Heller	Features: -Long Life -Photobiologically -Safe LED'S -Continuous -Row System
---	----------------------------------	---	---

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
20/28/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended




K014

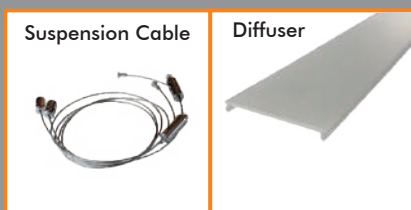


Application: -Office -Retail	Available in: -CC / CV	Driver: -Fulham -Osram -Heller	Features: -Long Life -Photobiologically Safe LED'S - Continuous -Row System
--	----------------------------------	---	--

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000K	Surface/Suspended

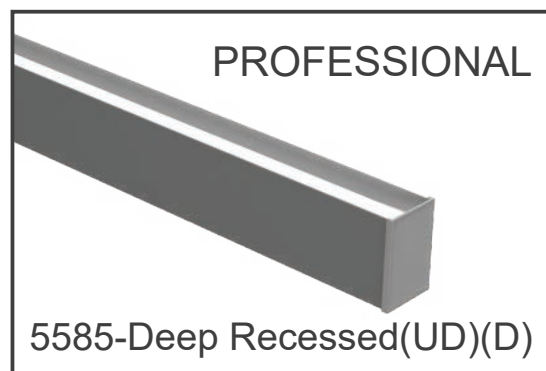


K015



Application: -Office -Confe. Room -Retail Outlet -Commercial space	Available in: -CC	Driver: -Fulham -Osram -Heller	Features: -UGR <19 -Driver Accessible from top -Direct Indirect Lighting
--	-----------------------------	---	--


Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28/40W	105lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended

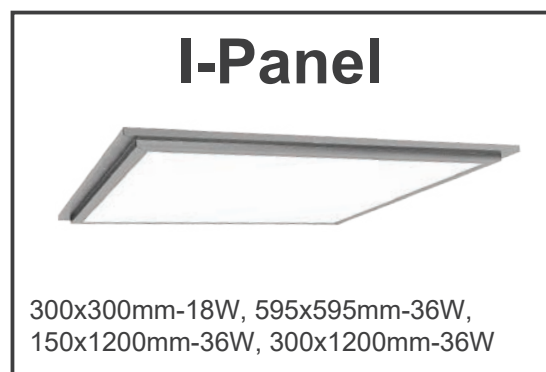

K016


Application:	-Offices & Conference Room -Home & Work Tables -Hallways & Galleries -Work Station
Available in:	-CC/CV
Driver:	-Fulham
Application:	-High Efficiency -Glare Free Light



Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
40W	110lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Recess/Suspended



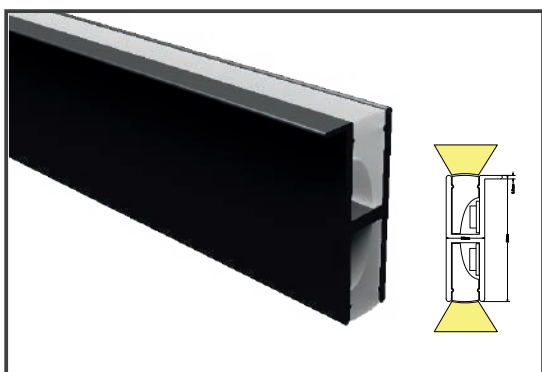

K017

General Specification

Applications

Shelf Up/Down

Body Aluminium Anodize

Dark Bronze/Matt Black

Accessories

End Caps

Mounting


Recessed

Voltage


12VDC

Slot

Width 8mm
Depth 18mm



Wattage	Efficacy	Make	LED Wattage	LED	CRI	CCT	Switch Mode
10W/Mtr.	100lm/W	Bridgelux	0.2W	2835	>80	3K, 4K, 6K	Sensor Friendly

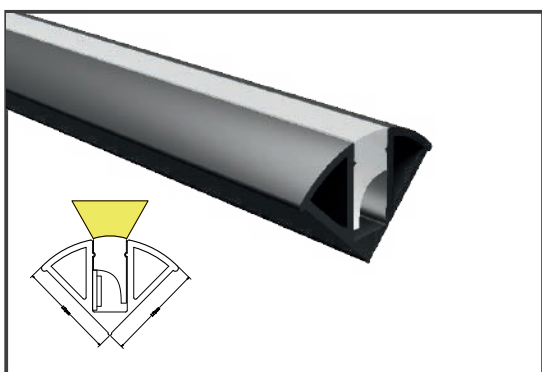

K018

General Specification

Applications

Corner Light

Body Aluminium Anodize

Dark Bronze / Matt Black

Accessories


End Caps / Mounting Clamps

Mounting

Surface

Voltage

12VDC




Mounting Clamp



Endcap

Wattage	Efficacy	Make	LED Wattage	LED	CRI	CCT	Switch Mode
5W/Mtr.	100lm/W	Bridgelux	0.2W	2835	>80	3K, 4K, 6K	Sensor Friendly

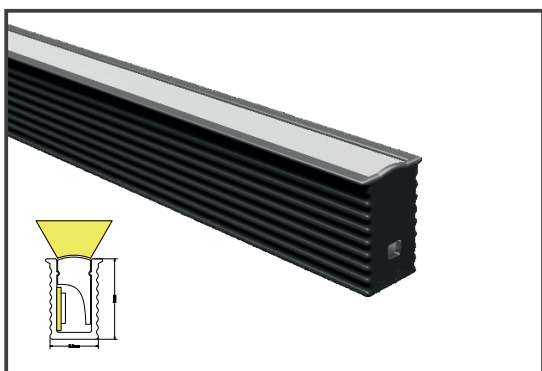

K019

General Specification:

Application

Skirting / Under Shelf

Body Aluminium Anodize

Dark Bronze / Matt Black

Accessories

End Caps

Mounting

Recessed

Voltage

12VDC


Slot

Width 5.5mm
Depth 9mm



Endcap

Wattage	Efficacy	Make	LED Wattage	LED	CRI	CCT	Switch Mode
5W/Mtr.	100lm/W	Bridgelux	0.2W	2835	>80	3K, 4K, 6K	Sensor Friendly

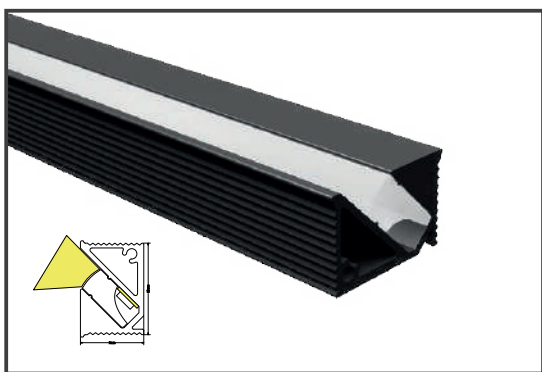

K020

General Specification:

Application

Wardrobe / Shelf Light

Body Aluminium Anodize

Dark Bronze / Matt Black

Accessories

End Caps

Mounting


Recessed

Voltage

12VDC


Slot

Width 13mm
Depth 9.5mm



Endcap

Wattage	Efficacy	Make	LED Wattage	LED	CRI	CCT	Switch Mode
5W/Mtr.	100lm/W	Bridgelux	0.2W	2835	>80	3K, 4K, 6K	Sensor Friendly

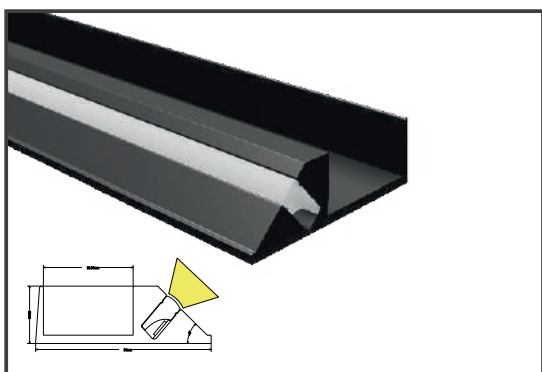

K021

General Specification:

Application

Shelf Highlighter

Body Aluminium Anodize

Dark Bronze / Matt Black

Accessories

End Caps

Mounting

Surface


Voltage

12VDC


Shelf

Thick 18mm

Depth 11mm



Wattage	Efficacy	Make	LED Wattage	LED	CRI	CCT	Switch Mode
5W/Mtr.	100lm/W	Bridgelux	0.2W	2835	>80	3K, 4K, 6K	Sensor Friendly

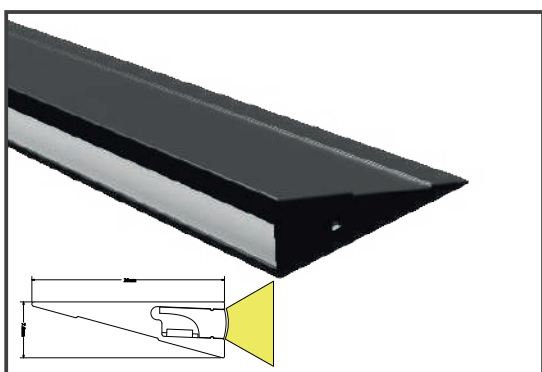

K022

General Specification:

Application

Invisible Shelf Lighter

Body Aluminium Anodize

Dark Bronze / Matt Black

Accessories


End Caps

Mounting

Surface

Voltage

12VDC




Wattage	Efficacy	Make	LED Wattage	LED	CRI	CCT	Switch Mode
5W/Mtr.	100lm/W	Bridgelux	0.2W	2835	>80	3K, 4K, 6K	Sensor Friendly

COMMERCIAL LUMINARIES




K023

Electrical Parameters	Specification
Driver Type	Constant Current - Isolated
Driver Make	Fulham, Osram, Tigidigital
Input Voltage	240 ± 10%
Power Factor	> 0.90 @ Full Load
THD%	< 15% @ Full Load
Driver Efficiency	≥ 85
Surge Protection	3KV
Optical	Specification
LED Make	Bridgelux / Seoul
CCT	3000K/4000K/5700K/6500K
CRI	80 (90 on Request)
Mechanical	Specification
IP Grade	20
Mounting Type	Suspended / Surface
Housing	Aluminium
Diffuser / Glass	UGR < 19
Powder shade	White, Black, Custom Shade on Request



DIMENSIONS (in mm)		
Wattage	Length	Height
36W	1180	29
72W	2355	29

Customised Lengths also Available.

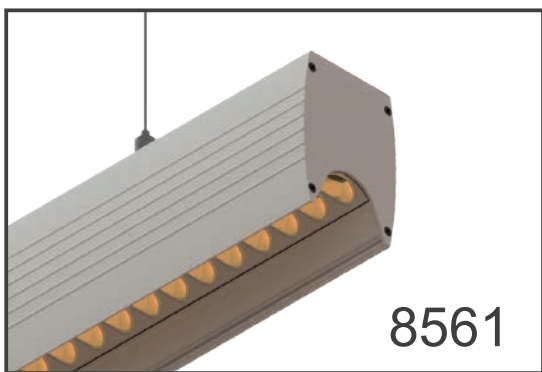


K024

Electrical Parameters	Specification
Driver Type	Constant Current - Isolated
Driver Make	Fulham, Osram, Tigidigital
Input Voltage	240 ± 10%
Power Factor	> 0.90 @ Full Load
THD%	< 15% @ Full Load
Driver Efficiency	≥ 85
Surge Protection	3KV
Optical	Specification
LED Make	Bridgelux / Seoul
CCT	3000K/4000K/5700K/6500K
CRI	80 (90 on Request)
Mechanical	Specification
IP Grade	20
Mounting Type	Suspended / Surface
Housing	Aluminium
Diffuser / Glass	UGR < 19
Powder shade	White, Black, Custom Shade on Request



DIMENSIONS (in mm)		
Wattage	Length	Height
36W	1085	85
72W	2165	85

Customised Lengths also Available.

TRADITIONAL SERIES OF MAGTETIC		
MODEL NO	PICTURE	DESCRIPTION
TR-PROFILE-10W		SMD Linear Light 10w Size(MM):L307*W22*H25mm
TR-PROFILE-20W		SMD Linear Light 20w Size(MM):L607*W22*H25mm
TR-PROFILE-30W		SMD Linear Light 30w Size(MM):L907*W22*H25mm
TR-LINEA-6W		COB Grille Light 6w Size(MM):L115*W22*H25mm
TR-LINEA-12W		COB Grille Light 12w Size(MM):L223*W22*H25mm
TR-LINEA FOLDING -6W		COB Wall Wahsher Light 6W Size(MM):L110*W22*H80mm
TR-LINEA FOLDING -12W		COB Wall Wahsher Light 12W Size(MM):L220*W22*H80mm
TR-TRACK-10W		COB Track light 10w Size(MM):Ø48*H105mm
TR-PENDENT-6W		COB Magnetic pendant light 6W Size(MM):Ø30*H300mm
TR-TRACK 01-1M		POP CONSEAL - 1 MTR
TR-TRACK 01-2M		POP CONSEAL - 2 MTR
TR-TRACK 02-1M		REGULAR SURFACE - 1 MTR
TR-TRACK 02-2M		REGULAR SURFACE - 2 MTR
TR-TRACK 03-1M		REGULAR CONSEAL - 1 MTR
TR-TRACK 03-2M		REGULAR CONSEAL - 2 MTR
TR-JOINTER-01		POP CONSEAL vertical corner
TR-JOINTER-01		POP CONSEAL horizontal corner
TR-JOINTER-02		REGULAR SURFACE vertical corner
TR-JOINTER-02		REGULAR SURFACE horizontal corner
TR-JOINTER-03		REGULAR CONSEAL Vertical corner

MAGNETIC SERIES AVAILABLE 6mm, 11mm, 26mm, 35mm
26mm, 35mm in this series dimmable and tunable available

TILTABLE



K025

M.R.P.: On Applicable

SPECIFICATION

Wattage	: 5W/8W/12W/20-24W/24-27W/27-40W
CCT	: 3000K/4000K/5700K/6500K
IP	: 20
Mounting Type	: Recess
Housing	: PDC Aluminium

Wattage	Outer	Height	Cut Out
5W	59mm	36mm	51mm
8W	71mm	58mm	61mm
12W	83mm	70mm	73mm
20W-24W	112mm	83mm	83mm
24W-27W	119mm	97mm	109mm
27W-40W	155mm	104mm	145mm

ZOOMLIGHT



K026

M.R.P.: On Applicable

SPECIFICATION

Wattage	: 27W / 36W
CCT	: 3000K/4000K/5700K/6500K
IP	: 20
Mounting Type	: Recess
Housing	: PDC Aluminium

Wattage	Outer	Height	Cut Out	Wattage	Outer	Height	Cut Out
27W	132mm	108mm	123mm	36W	145mm	147mm	139mm

HONEY COMB PULL OUT




K027

SPECIFICATION

Wattage	Mounting	Cutout
7W	Recess	55
7W Sq	Recess	55
12W	Recess	75
2x7W(14W)	Recess	126 x 65
2x12W (24W)	Recess	178 x 88
CCT	3000K/4000K/5700K/6500K	

FIXED CURVE

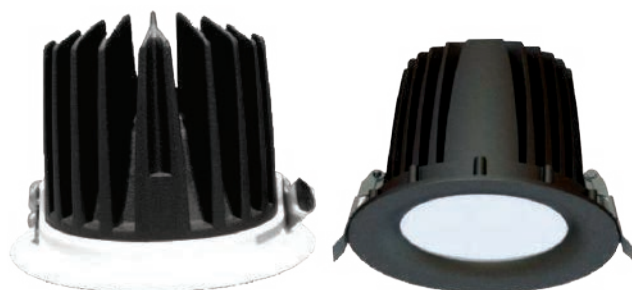

K028

M.R.P.: On Applicable

SPECIFICATION

Wattage	: 12-15W/27-40W
CCT	: 3000K/4000K/5700K/6500K
IP	: 20
Mounting Type	: Recess
Housing	: PDC Aluminium

Wattage	Outer	Height	Cut Out
12W-15W	82mm	65mm	72mm
27W-40W	129mm	104mm	119mm

SURFACE CYLINDER



M.R.P.: On Applicable

K029

SPECIFICATION

Wattage	: 7W/12W/18W
CCT	: 3000K/4000K/5700K/6500K
IP	: 20 (Also available IP65)
Mounting Type	: Surface
Housing	: Aluminium
Diffuser	: Acrylic / Glass

DIMENSIONS (in mm)

Wattage	Diameter	Height
7W	Ø 55	70
12W	Ø 88	60
18W	Ø 98	65

PANDENT CYLINDER



M.R.P.: On Applicable

K030

SPECIFICATION

Wattage	: 15W/20W
CCT	: 3000K/4000K/5700K/6500K
IP	: 20
Mounting Type	: Suspended
Housing	: Aluminium
Diffuser	: Acrylic / Glass

DIMENSIONS (in mm)

Wattage	Diameter	Height
15W	Ø 80	180
20W	Ø 80	180

CYLINDER



M.R.P.: On Applicable


K031

SPECIFICATION

Wattage	: 12W
CCT	: 3000K/4000K/5700K/6500K
IP	: 20
Mounting Type	: Surface
Housing	: Aluminium
Diffuser	: Acrylic / Glass

DIMENSIONS (in mm)

Wattage	Diameter	Height
12W	Ø 85	95

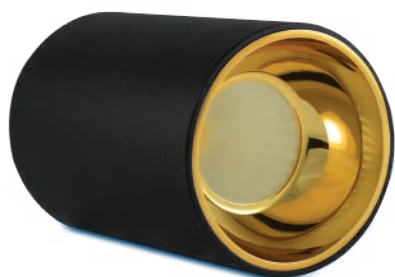

M.R.P.: On Applicable


K032

SPECIFICATION

Wattage	: 7W/12W
CCT	: 3000K/4000K/5700K/6500K
IP	: 20
Mounting Type	: Surface
Housing	: PDC Aluminium
Diffuser	: Acrylic / Glass

DIMENSIONS (in mm)

Wattage	Diameter	Height
7W	Ø 52	83
12W	Ø 52	83

	Cat. Ref.	Watt.	Description	Price
	K033 SL	36 Watt. 50 Watt.	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	1600.00 1800.00
	ECO			
	K034 SL	24 Watt. 30/36 Watt. 50 Watt. 60 Watt.	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	1200.00 1400.00 1900.00 2200.00
	BRIDGE			
	K035 SL	60 Watt. 72 Watt. 100 Watt. 120 Watt.	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	2300.00 2500.00 3200.00 3500.00
	ECO			
	K036 SL	24 Watt. 36 Watt.	High Power LED Street Light (2835 High Power 1Watt. 9v 100mA)	1000.00 1300.00
	Lens Type			
	K037 SL	50 Watt. 100 Watt.	High Power LED Street Light (2835 High Power 1Watt. 9v 100mA)	2000.00 3500.00
	Lens Type			
	K038 SL	24 Watt. 36 Watt. 50 Watt.	Economic Model LED Street Light	500.00 600.00 700.00
	K039 SL	60 Watt.	Housing : ABS, Housing color : Grey Power : 60W,Solar Panel: 6V/10W polycrystalline silicon 396 x 212mm Led: 120PCS x1W, Working Time: 10hrs Charging Time:45hrs, IP Grade: IP65 Radar Sensor: Detective distance 8-12m	7000.00
	Solar			

	Cat. Ref.	Watt.	Description	Price
	K040	30 Watt.	High Power LED Flood Light	2000.00
		60 Watt.	(2835 High Power 1Watt. 9v 100mA)	3000.00
		100 Watt.		5000.00
		150 Watt.		6500.00
	Back Driver	200 Watt.	Extra Surge Protection 10kv	8500.00
		250 Watt.		9500.00
	K041	150 Watt.	RGBW LED Flood Light	ON REQUEST
		200 Watt.	With DMX	
	K042	30 Watt.	High Power LED Flood Light	1400.00
		50 Watt.	(2835 High Power 1Watt. 9v 100mA)	1800.00
		100 Watt.		2500.00
		150 Watt.		3500.00
	Down Driver	200 Watt.		4500.00
	K043	50 Watt.	Economic High Power LED Flood Light	1700.00
		100 Watt.	(2835 High Power 1Watt. 9v 100mA)	2300.00
	Down Driver			
	K044	50 Watt.	Economic Model	950.00
		100 Watt.	LED Flood Light	1200.00
		150 Watt.		1400.00
		200 Watt.		1600.00
	K045	7Watt.	Spike Light	650.00
		15Watt.		900.00



Cat. Ref.	Watt.	Description	Price
K046	03 Watt.	Panel Light 71(ID) x 80(OD)	350.00
	06 Watt.	105(ID) x 121(OD)	400.00
	09 Watt.	105(ID) x 121(OD)	500.00
	12/15 Watt.	153(ID) x 171(OD)	590.00
	18/22 Watt.	204(ID) x 225(OD)	850.00
		Available with CCT Tunable	



K047	12-15 Watt. 18-20 Watt.	DIA-140 mm / HEIGHT-50 mm SURFACE DOWNLIGHT Available with CCT Tunable	ON REQUEST
------	----------------------------	---	------------



K048 Deep Recessed	12 Watt.	Dia 148	Height 60	Cut out 130	Center Deep	1100.00
	15 Watt.	148	60	130	(2835 /.2Watt. 9v 60mA)	1200.00
	18 Watt.	166	60	150	(Diffuser P.C. Optical Grade)	1400.00
	24 Watt.	195	60	180		
					Available with CCT Tunable	



K049	7 Watt.	Moon COB Down Light		850.00
	12 Watt.	Dimention	Cut out	1050.00
	18 Watt.	70 x 55	Ø 60	1350.00
		88 x 60	Ø 75	
		98 x 65	Ø 88	



K050	7 Watt.	Creta COB Down Light		660.00
	12 Watt.	Dimention	Cut out	830.00
	18 Watt.	70 x 55	Ø 60	1150.00
		88 x 60	Ø 75	
		98 x 65	Ø 88	




K051	6 Watt.	Olive Square Linea		430.00
	12 Watt.	Dimention	Cut out	535.00
	18 Watt.	L73x33xH40	Ø66 x 25	910.00
		L134x33xH40	Ø125 x 25	
		L73x73xH40	Ø65 x 65	



K052	3W Copper / Satin	Ignite COB Down Light		400.00
	6 Watt.	Dimention	Cut out	650.00
	12 Watt.	28	Ø28	710.00
	18 Watt.	50	Ø50	1160.00
		75	Ø75	
		85	Ø85	



K053	3/6 Watt.	COB Down Light (LX Type)		700.00
	10/12 Watt.	Tilttable Model		800.00
	16/18 Watt.			1200.00
	30 Watt.			1500.00
		Available with CCT Tunable		

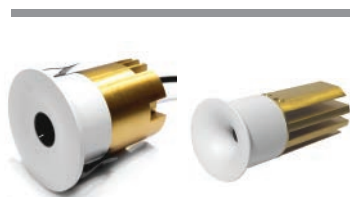

Cat. Ref.	Watt.	Description	Price
K054	7/12Watt.	COB Down Light With Silan Cross Link Lens	On Request



K055	7/12Watt.	COB Down Light With Silan Cross Link Lens	On Request
------	-----------	--	------------



K056	12Watt.	Slim Linear Light With Spot	On Request
------	---------	--------------------------------	------------



GARDEN LIGHTS



K057	12 Watt. 18Watt.	Gate Light	1650.00 2600.00
------	---------------------	------------	--------------------



K058	20 Watt.	Freedom	1500.00
------	----------	---------	---------







K059	40 Watt. 60 Watt.	400mm Posttop Gate Light 600mm Posttop Gate Light	7200.00 10800.00
------	----------------------	--	---------------------



K060	3 Watt. 5 Watt. 9 Watt.	INGROUND LED LIGHT	1800.00 2000.00 2400.00
IP67			



K061	36 Watt.	WALL WASHER LED LIGHT	8000.00
IP67			


	Cat. Ref.	Watt.	Description	Price
	K062	(1 x 1 Recess) 24 Watt.	Clean room luminaire with powder coated MS/SS bottom frame acrylic lens. Recess mounting - bottom opening 300 x 300 mm	3200.00
	K063	(1 x 2 Recess) 24 Watt. 36 Watt.	Clean room luminaire with clear sheet and powder coated MS/SS bottom frame. Indoor recess mounting top opening 300 x 600 mm, Top and Bottom Opening	3800.00 4200.00
	K064	(2 x 2 Recess) 36 Watt. 45 Watt.	Clean room luminaire with clear sheet and powder coated MS/SS bottom frame. Indoor recess mounting top opening 600 x 600 mm, Top and Bottom Opening	4600.00 5200.00
	K065	(1 x 1 Recess) 25 Watt.	Clean room luminaire with powder coated MS/SS bottom frame acrylic lens. Recess mounting - bottom opening	3900.00
	K066	(2 x 2 Surface) 36 Watt. 45 Watt.	Clean room luminaire with clear sheet and powder coated MS/SS Bottom Frame. Indoore Surface mounting. 600 x 600mm	4800.00 5000.00
	K067	2 x 2 Slim Panel 36W 1 x 4 Slim Panel 36W	2 x 2 Deep draw body with 35mm deep (Surface Frame Available)	1400.00
	K068	20 Watt. 40 Watt.	Industrial Batten	1100.00 1200.00



Cat. Ref.	Watt.	Description	Price
K069	50 Watt. 100 Watt. 150 Watt. 200 Watt.	UFO Highbay	3200.00 4600.00 6500.00 9000.00



K070	50 / W LED 100 / W LED 150 / W LED	LED Highbay Economy	2500.00 3500.00 5000.00
------	--	---------------------	-------------------------------



K071	18 Watt 36 Watt	Weather Proof Fitting with LED IP65.	3000.00 3600.00
------	--------------------	--------------------------------------	--------------------




K072	1 x 18W FTL 2 x 18W FTL 2 x 36W FTL 1 x 36W FTL	Corrosion Proof Street Light Outdoor application injection moulded polycarbonate body & cover, weather proof luminaire suitable for adverse environments. IP65. Suitable for T8 Led Tube	On Request
------	--	--	------------



K073	30 Watt. 35 Watt. 40 Watt. 60 Watt.	High Power LED Bay Light (2835 High Power 1Watt. 9v 100mA) Extra Surge Protection 10kv	1400.00 1600.00 1800.00 2000.00
BACK Driver			


LED COMMERCIAL DOMESTIC



K074	300 x 50 x 70mm 450 x 50 x 70mm 600 x 50 x 70mm 750 x 50 x 70mm 900 x 50 x 70mm 1200 x 50 x 70mm	Pendent Moon Ceiling Light with Aluminium Extrusion Difuser / Opal / Prismatic	On Request
------	---	--	------------



K075	300 x 50 x 70mm 450 x 50 x 70mm 600 x 50 x 70mm 750 x 50 x 70mm 900 x 50 x 70mm 1200 x 50 x 70mm	Pendent Ring Type Ceiling Light with Aluminium Extrusion Difuser / Opal / Prismatic	On Request
------	---	---	------------



K076	1 x 6/10 Watt. 1 x 24 Watt. 2 x 6/10 Watt. 2 x 24 Watt. 3 x 6/10 Watt. 3 x 24 Watt.	Gimbal Down Light	1500.00 1650.00 2200.00 1800.00 2150.00 2600.00
------	--	-------------------	--



Cat. Ref.	Watt.	Description	Price
K077	30 Watt. (LED Bulb)	Prismatic Pendant Holder (16")	1200.00




K078	9 Watt. 15/18 Watt. 30 Watt. (LED Bulb)	9" Prismatic Dome Holder 12" 16"	1000.00 2000.00 3000.00
------	--	--	-------------------------------



K079	4 Watt.	4Way Up Down Ball	550.00
------	---------	-------------------	--------



K080	2 Watt. 4 Watt. 6 Watt.	2/4/6 Way Updown Light	450.00 570.00 990.00
------	-------------------------------	------------------------	----------------------------




K081	T2 1Mtr T2 2Mtr T3 1Mtr T3 2Mtr	Track Patti with live and dead end	900.00 1700.00 900.00 1700.00
------	--	------------------------------------	--



K082	T2 T3	Track Patti Power Adapter (Jointer Available- On Request)	120.00 120.00
------	----------	--	------------------



K083	12 Watt. 20 Watt. 30W - 750ma	Track Compass	650.00 860.00 1070.00
------	-------------------------------------	---------------	-----------------------------



K084	36W 42W	T LINE K Aluminum Extruded TRUNK / CRCA TRUNK - With Wire 1.5 mtr TRUNK / CRCA TRUNK - With Wire 3 mtr	2000.00 800.00 1800.00
------	------------	---	------------------------------



12V

Sr.	Amp.	Watt	Price
1.	2	24	300/-
2.	3	36	450/-
3.	4	48	600/-
4.	5	60	800/-
5.	6.5	78	1000/-
6.	8	96	1300/-
7.	10	120	1400/-
8.	12	144	1600/-
9.	15	180	1800/-
10.	20	240	2000/-

24V

Sr.	Amp.	Watt	Price
1.	2.5	50	600/-
2.	5	125	800/-
3.	7.5	200	1200/-
4.	10	250	1600/-

48V

Sr.	Amp.	Watt	Price
1.	2	100	000/-
2.	5	250	000/-

RF DRIVER

Sr.	Amp.	Watt	Price
1.	150	7	700/-
2.	300	12	800/-
3.	350	15	950/-
4.	400	18	1200/-
5.	500	24	1400/-
6.	900	36	1600/-

RF REMOTE

1.	500/-
----	-------

RF RELAY control up to 200w
LED STRIP Tuneable

LED STRIP LIGHT

Product Description: LED Strip Light 5m | 2835 | 27 Lumens



Color:		
CW	NW	WW
RED	GREEN	BLUE
PINK	AMBER	ICE BLUE
12V-1m	M.R.P. (Incl. of all taxes) (For 5M)	
60 Led	₹ 600/-	
120 Led	₹ 900/-	
180 Led	₹ 1050/-	
204 Led	₹ 1200/-	
240 Led	₹ 1400/-	

PROTECTION

Level of protection (IP)

What is IP? The IP (level of protection) is a two digit number which indicates the protection level provided by the housing of the lighting of the lighting appliance.

The first digit indicates the protection level against water.

1st digit protection against solid bodies			2nd digit protection against liquids		
IP	Tests		IP	Tests	
0		Unprotected	0		Unprotected
1	Ø50mm 	Protected from solid bodies more than 50 mm. (Eg. Accidental contact with a hand)	1		Protected from vertically falling drops of water (condensation)
2		Protected from solid bodies more than 50 mm. (Eg. Accidental contact with a hand)	2		Protected from vertically falling drops of water (condensation)
3		Protected from solid bodies more than 2,5 mm. (Eg. Tools, wires or similar)	3		Protected from rain water falling at angle up to 60° from the vertical
4		Protected from solid bodies more than 1 mm. (Eg. Small Tools, fine wires...)	4		Protected from water sprayed in all directions
5		Protected from dust (without harmful deposits)	5		Protected from water jetting in all directions
6		Total protection from dust	6		Protected from heaving water similarto heavy seas.
			7		Protected from immersion in water
			8		Protected from prolonged immersion in water at a specified pressure.
The two first digits are defined by the norms UTE C 20 010, IEC 144 and 525 and DIN 40 050			The two first digits are defined by the norms UTE C 20 010, IEC 144 and 525 and DIN 40 050		

Series and Automation	Wire	DALI	Analog
6MM Thin Magnetic Track Channels	2 wire	NO	NO
10MM PIEZO Magnetic Track Channels	2 wire	NO	NO
15MM Micro Magnetic Track Channels	2 wire	NO	NO
20MM Magneto Track Channels	4 wire	Yes	Yes
26MM Magnetic Track Channels	4 wire	Yes	Yes
36MM Magnetic Track Channels	4 wire	Yes	Yes

Terms and Conditions.

- 1] Technical Specifications are subject to change without prior notice.
- 2] The prices are inclusive of excise duty at the prevalent rates, but exclusive of taxes, octroi, local levies if any which will be charged extra as applicable.
- 3] Any statutory variations at the time of delivery / sale will be borne by the customer.
- 4] All Luminaries prices indicated in the Price Reckoner are without lamp source.
- 5] Prices indicated to be read in conjunction with terms & conditions.
- 6] Lighting Engineers is constantly developing and improving its products for this reason all product descriptions in this brochure are intended as a general guide and we may change some specifications from time to time in the interest of product improvement. Hence specifications and dimensions are subject to change without prior notice.

Warranty Clause

Lighting Engineers undertakes to repair or replace products, at their discretion, which are found to be defective, solely as a result of faulty material and (or) workmanship, within 1 year from the date of purchase. The warranty defines the Company's entire liability and does not cover consequential loss or damage, or reinstallation cost arising from defective product. The Company reserves the right to change/improve the design, without prior notice. In such cases, replacements shall be carried out, with design of the products/accessories prevailing in time. The warranty for the products will be invalidated, if the product is altered or rectified.



LIGHTING ENGINEERS

Address : 6/7, Vora Ind. Est. No.2, Navghar, Vasai (East), Dist. Palghar - 401 210 (India)
 Phone : +91 250 2391243 / 2391075 / 2390975
 Mobile : +91 70286 45648
 E-mail : lightingengineers@rediffmail.com, info@lightingengineersin
 Website : www.lightingengineers.in



ISO 9001-2015 / ISO 14001-2015

Note : data given in this catalogue is subject to variation without notice due to change / improvement in design, materials & process.