
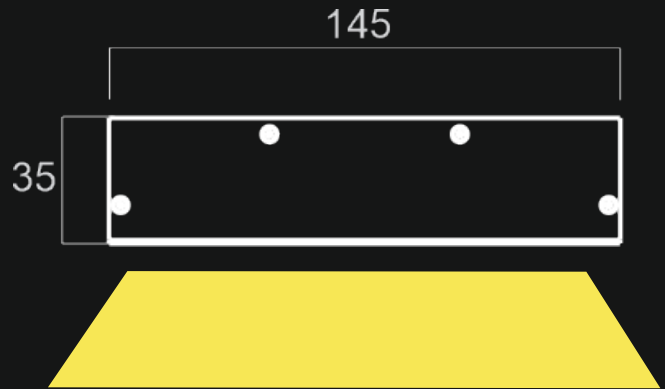


# Linear Suspended - 14535 - SD

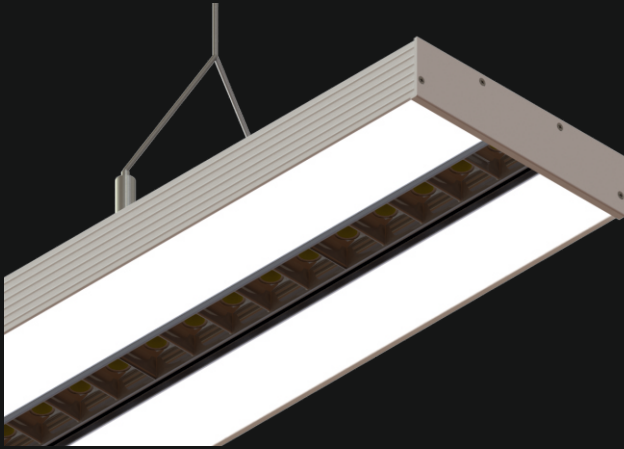

Electrical Parameters	Specification
-----------------------	---------------

Driver Type	Constant Current - Isolated
Driver Make	Fulham, Osram, Tigidigital
Input Voltage	240 ± 10%
Power Factor	> 0.90 @ Full Load
THD%	< 15% @ Full Load
Driver Efficiency	≥ 85
Surge Protection	3KV

Optical	Specification
---------	---------------

LED Make	Bridgelux / Seoul
CCT	3000K/4000K/5700K/6500K
CRI	80 (90 on Request)

Mechanical	Specification
------------	---------------

IP Grade	20
Mounting Type	Suspended / Surface
Housing	Aluminium
Diffuser / Glass	UGR < 19, PMMA-Snapfit
Powder shade	White, Black, Custom Shade on Request


### Application

- Offices
- Architectural
- Living Spaces
- Shopping Malls

### Features

- Continuous
- 50,000Hrs Lifespan
- Glare Free Light
- Driver Outside

### Beam Options



### Driver Options



**UGR < 15**

DIMENSIONS (in mm)		
Wattage	Length	Height
36W	1195	35
72W	2390	35

**Customised Lengths also Available.**