
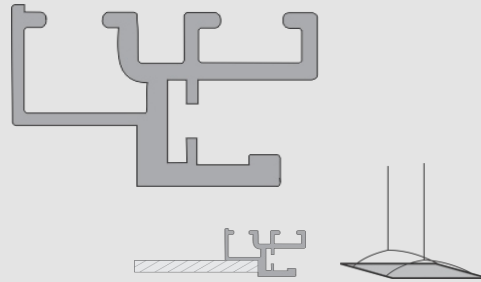


K-IP-1'x4'

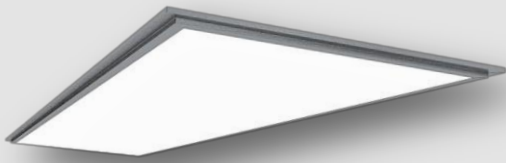

This Series of LED luminaires deliver 80≥ CRI illumination and 80≥ lumens per watt. Customise size and mounting options available.

FEATURES:

1. High CRI
2. Long Life & High reliability
3. Dimmable and Non Dimmable options
4. No UV & IR, No mercury
5. Specially engineered thermal management

APPLICATION:

1. Commercial Lighting
2. Airports
3. Office Space
4. Educational Institutes
5. Hospitality
6. Hotels & Restaurants
7. Retail Shops & Showrooms & Malls
8. Banks



Specification:

FIXTURE:	
Profile	Aluminium
Diffuser	Korea (PS)
Mounting	Surface, Recess, Suspended
LAMP SOURCE:	
Make	Osram / Bridglux
LED PART.	2835
Wattage	36W
Lumen	3600lm
CRI	≥ 80 /watt
Life	30,000 hrs
PCB	MCPCB
DRIVER: Fulham	
Body	ABS
PF	0.99
Voltage	36W
Temperature	-10 ~ +50°C
Current / Output Voltage	1.00A/21-36Vdc
Surge	3kv
OTHER:	
Beam Angle	120°
Size	1' x 4' (295 x 1195)

6/7, Vora Industrial Estate No.2, Navghar, Vasai (E) Dist. Palghar 401 210
 Tel No. : 0250 2391243 / 2390975 Email : lightingengineers@rediffmail.com
 Web site : www.lightingengineers.in